



Mail Server Details

Main SMTP Server: mail.aussiebroadband.com.au

Login: None

Password: None

Port: 25

Authentication: No

Main SMTP Server: mail.aussiebroadband.com.au

Login: your email address

Password: your password

Port: 465

Authentication: SSL/TLS


Aussiebroadband requires DNS entries to be added also. They use a primary and secondary server Australia wide. On your MFD these will generally be found under Network Settings then TCP/IP

Aussiebroadband DNS Entries
Primary DNS: 202.142.142.142
Secondary DNS: 202.142.142.242

Setup on the MFD Web Interface

Desktop Series 1

1. Input your printers TCPIP address into your web browser

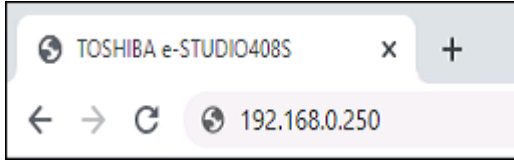

2. Go to Settings > Network Port > SMTP Setup

Settings

SMTP Setup

Primary SMTP Gateway Required.

Primary SMTP Gateway Port Default Port: 25 Range: 1-65535

Secondary SMTP Gateway

Secondary SMTP Gateway Port Default Port: 25 Range: 1-65535

SMTP Timeout Range: 5-30 seconds.

Reply Address Example: jsmith@mydomain.com.

Use SSL/TLS ▾

Validate CA

Authentication

SMTP Server Authentication ▾

Device-Initiated E-mail ▾ E-Mail Alerts, Fax Forwarding, etc.

User-Initiated E-mail ▾

Device Credentials

Use Active Directory Device Credentials Status: Not Joined

Device Userid

Device password

Kerberos 5 REALM Required for some Authentication Types.

NTLM Domain Required for NTLM Authentication.

3. Input your SMTP details and hit submit. If authentication is required, please use the second setup outlined above.


- Next go to Settings > Network Port > TCPIP

DNS Server Address	<input type="text" value="202"/>	.	<input type="text" value="142"/>	.	<input type="text" value="142"/>	.	<input type="text" value="142"/>	If DHCP or BOOTP is not on the network
Backup DNS Server Address	<input type="text" value="202"/>	.	<input type="text" value="142"/>	.	<input type="text" value="142"/>	.	<input type="text" value="242"/>	

- Scroll down to the DNS server address and input your DNS information
- Press "Submit"

Desktop Series 2

1. Input your printers TCPIP address into your web browser

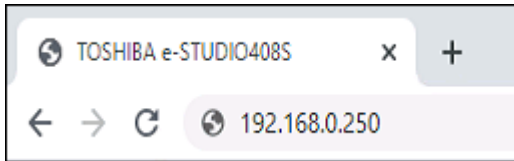

2. Go to Settings > Email Setup

⌵ E-mail Setup

Primary SMTP Gateway Required.

Primary SMTP Gateway Port Range: 1-65535. Default = 25.

Secondary SMTP Gateway

Secondary SMTP Gateway Port Range: 1-65535. Default = 25.

SMTP Timeout Range: 5-30 seconds

Reply Address

Always use SMTP default Reply Address

Use SSL/TLS ▾

Require Trusted Certificate

SMTP Server Authentication ▾

Device-Initiated E-mail ▾ E-Mail Alerts, Fax Forwarding, etc.

User-Initiated E-mail ▾

Use Active Directory Device Credentials

Device Userid

Device Password

Kerberos 5 REALM Required for some Authentication Types.

NTLM Domain Required for NTLM Authentication.

7. Input your SMTP Details and press “Save” If authentication is required, please use the second setup outlined above.


3. Next click on Network Ports > TCPIP

DNS Server Address	<input type="text" value="202.142.142.142"/>	If DHCP or BOOTP is not on the network
Backup DNS Server Address	<input type="text" value="202.142.142.242"/>	

4. Input DNS entries then press "Save"

EBN and EBX using TopAccess

1. Input your printers TCPIP address into your web browser

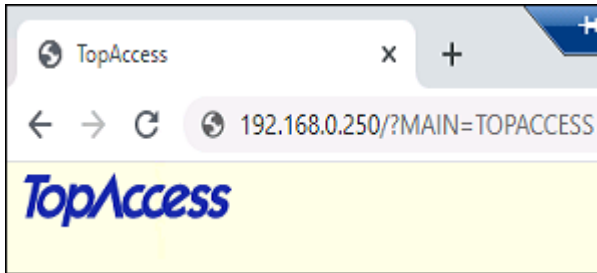

1. Login with User name (admin) and Password (123456)
2. Then click on Administration > Network > SMTP Client



202

3. Input your SMTP details.
4. Press “Save” If authentication is required, please use the second setup outlined above.
5. Click on “Network”



6. Click on “DNS”

7. Input your DNS entries

DNS				
Enable DNS	Enable ▾			
Primary DNS Server Address	202	142	142	142
Secondary DNS Server Address	202	142	142	242

8. Scroll to the bottom and press "Save"

9. You also need to set a valid send from address, go to Administration > Setup > Email

General Setting	
From Address	mobileprint.dsf@aussiebroadband.com.au
From Name	es5015AC

10. Input a valid email account here.

11. Press "Save"