



TOSHIBA

PRINTER / MFD REMOTE SETUP

Microsoft Windows 10



Microsoft Windows 10 Driver Installation

This guide was created to assist remote users working from home, in the setup of their Printer or MFD.


All guides were created using Windows 10

This document covers the following models

Desktop A4 Series 2
Colour
- e-STUDIO 338CS / 388CS / 388CP / 389CS
- e-STUDIO 479CS
Monochrome
- e-STUDIO 408P / 408S / 408P / 448S
- e-STUDIO 478S / 478P / 528P
Desktop A4 Series 1
Colour
- e-STUDIO 305CS / 385S / 305CP / 306CS
Monochrome
- e-STUDIO 385P / 470P / 520P / 525P / 425S
Other Series
Mono
- e-STUDIO 2309A / e-STUDIO 2822 AF

Downloading the Driver:

1. Find and download your driver at <https://www.toshiba-business.com.au/support/drivers>
search for your Toshiba MFD model in the Search bar

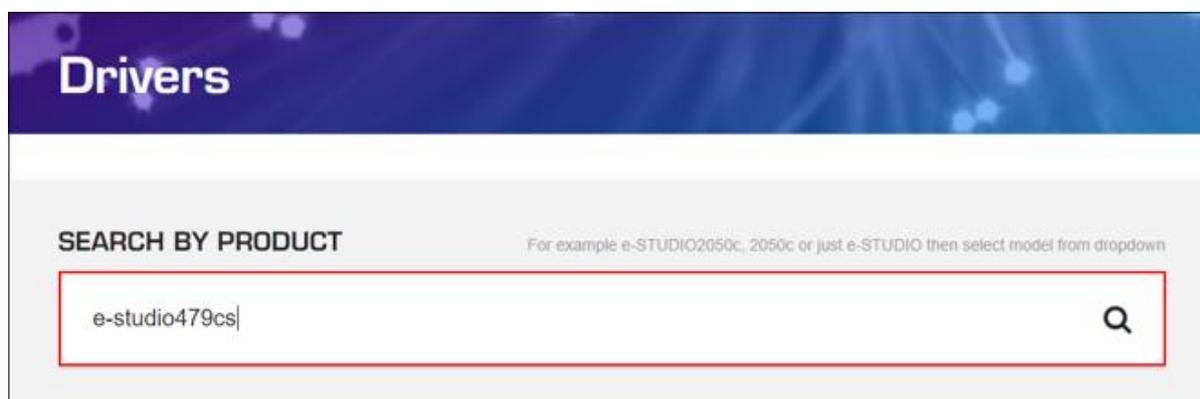


Drivers

SEARCH BY PRODUCT For example e-STUDIO2050c, 2050c or just e-STUDIO then select model from dropdown

e-studio479cs

2. After searching, please select the driver of your choice and select **“Download”**

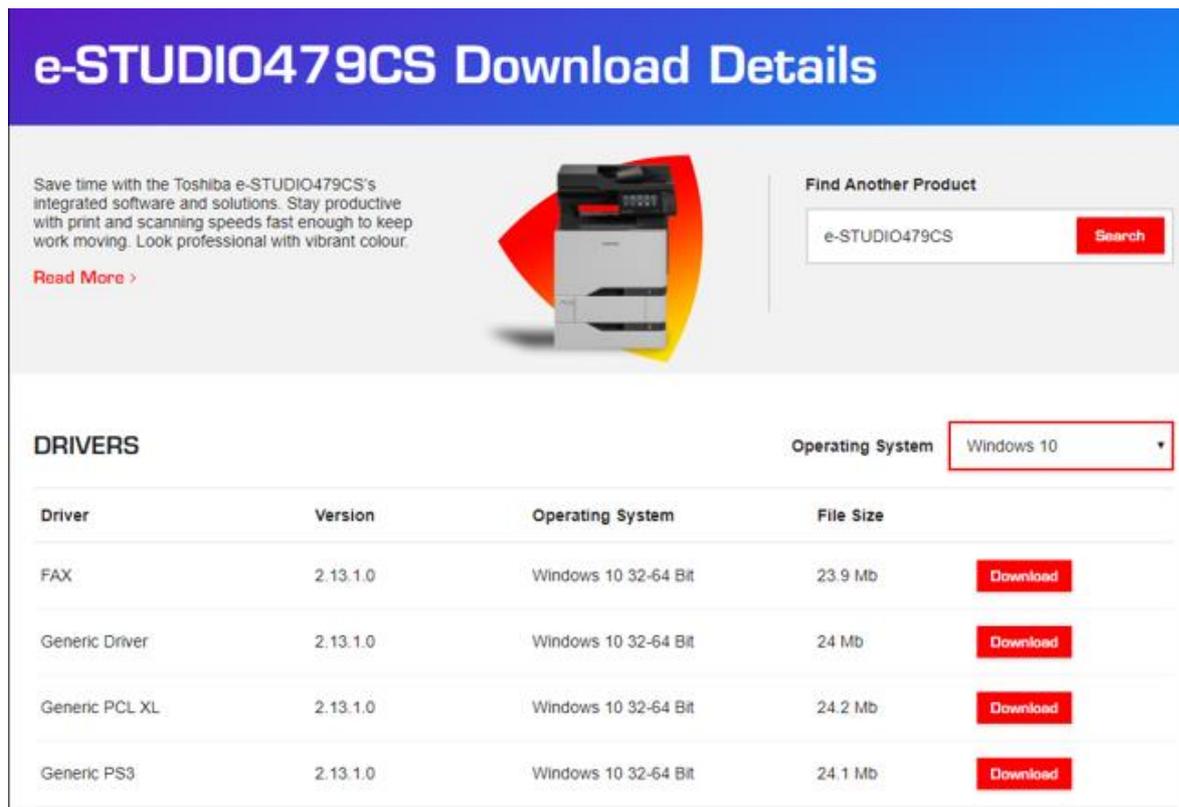

Save time with the Toshiba e-STUDIO479CS's integrated software and solutions. Stay productive with print and scanning speeds fast enough to keep work moving. Look professional with vibrant colour.

[Read More >](#)


Find Another Product

e-STUDIO479CS


DRIVERS Operating System: Windows 10

Driver	Version	Operating System	File Size	
FAX	2.13.1.0	Windows 10 32-64 Bit	23.9 Mb	<input type="button" value="Download"/>
Generic Driver	2.13.1.0	Windows 10 32-64 Bit	24 Mb	<input type="button" value="Download"/>
Generic PCL XL	2.13.1.0	Windows 10 32-64 Bit	24.2 Mb	<input type="button" value="Download"/>
Generic PS3	2.13.1.0	Windows 10 32-64 Bit	24.1 Mb	<input type="button" value="Download"/>


3. Click **“Open”** once the file has downloaded.

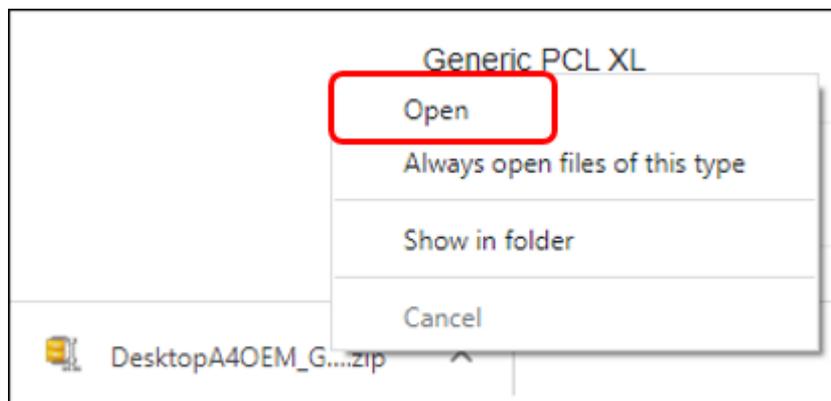

4. Browse to your downloads directory double click on the file, then click on **“Extract all”**

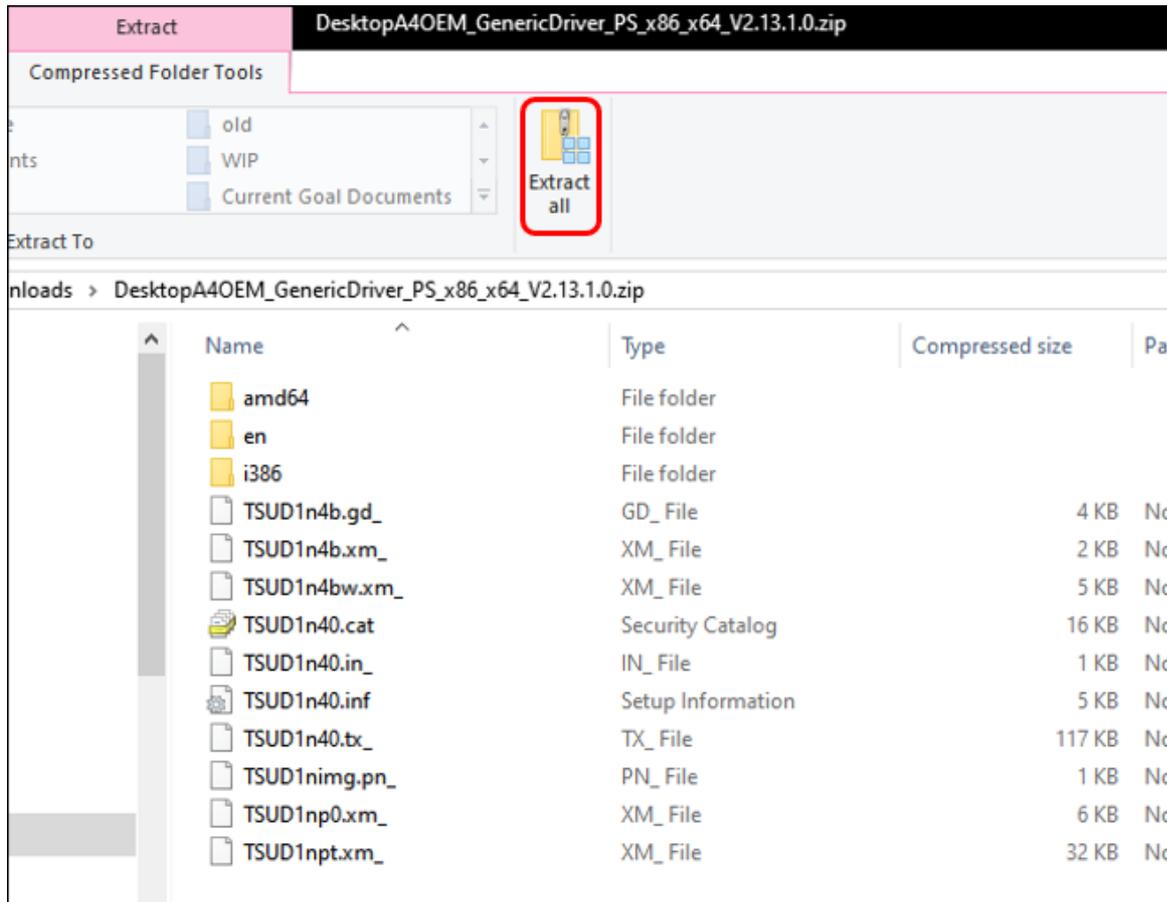


5. Then click on **“Extract”**

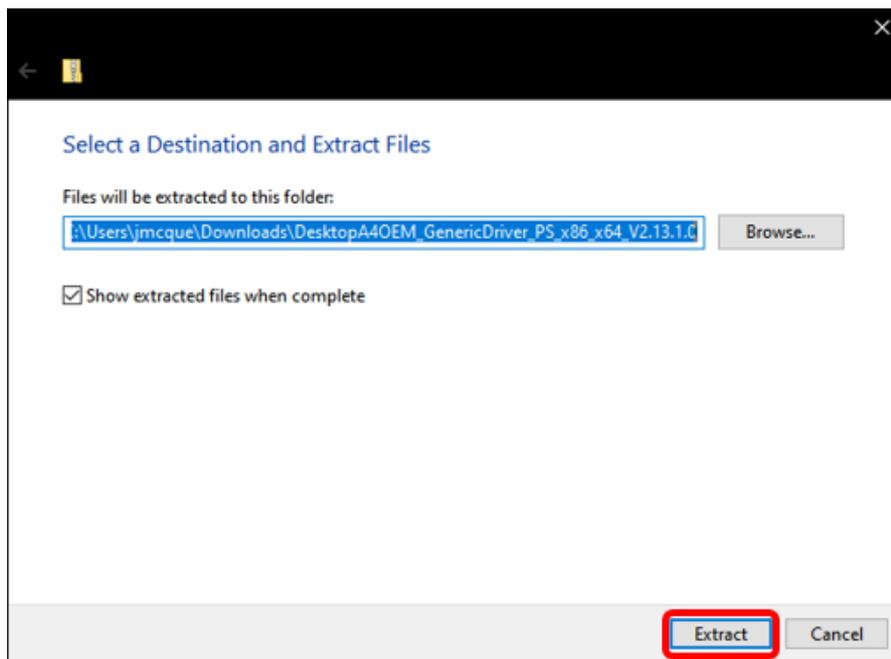


Creating a Print Queue:


1. Click on the search option on the taskbar, type in “**Control Panel**” and select it

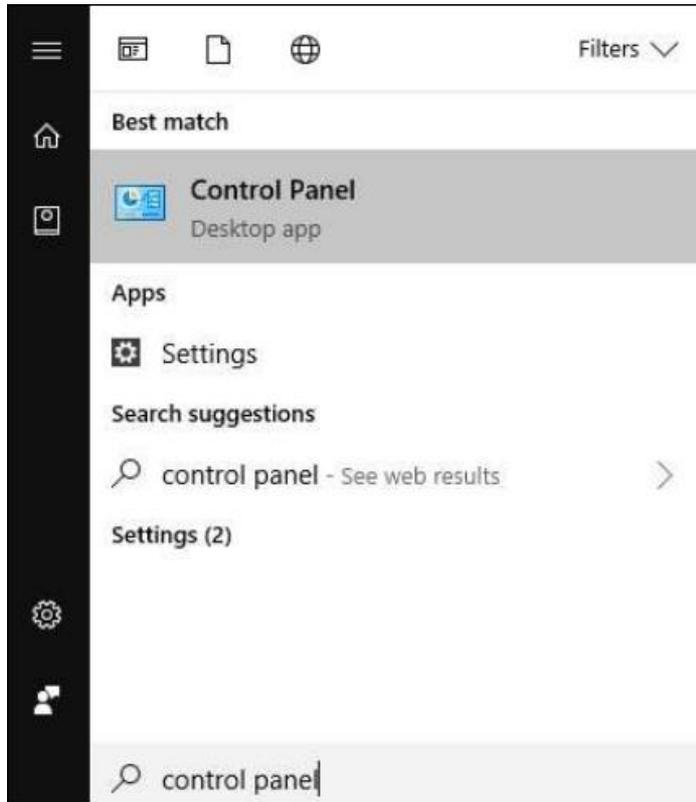


2. Next press the “**View devices and printers**” link

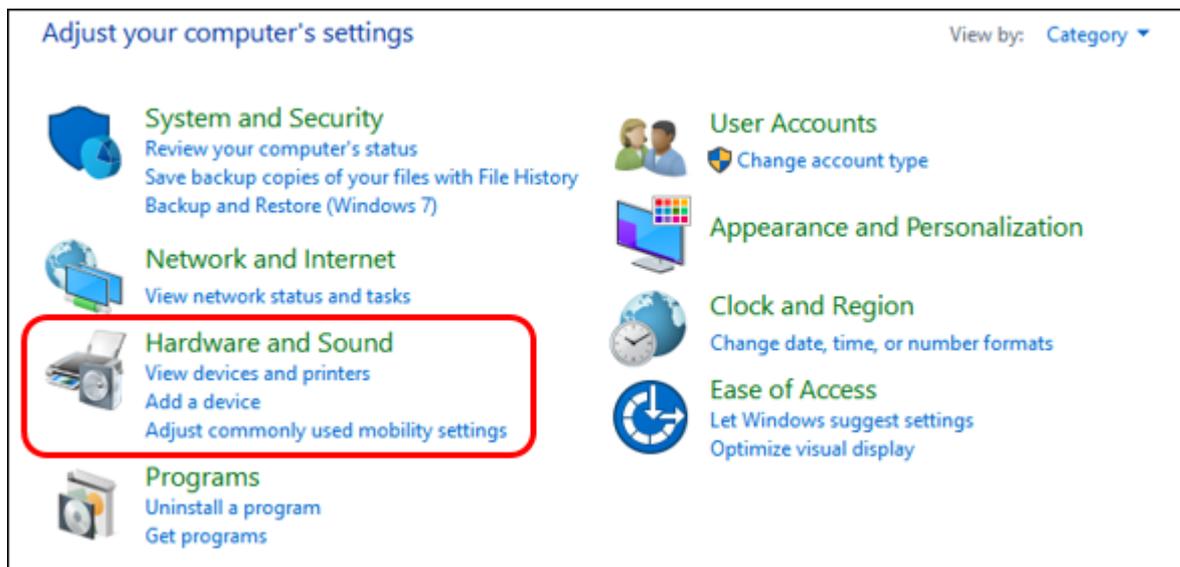


3. Next press the “Add a printer” button

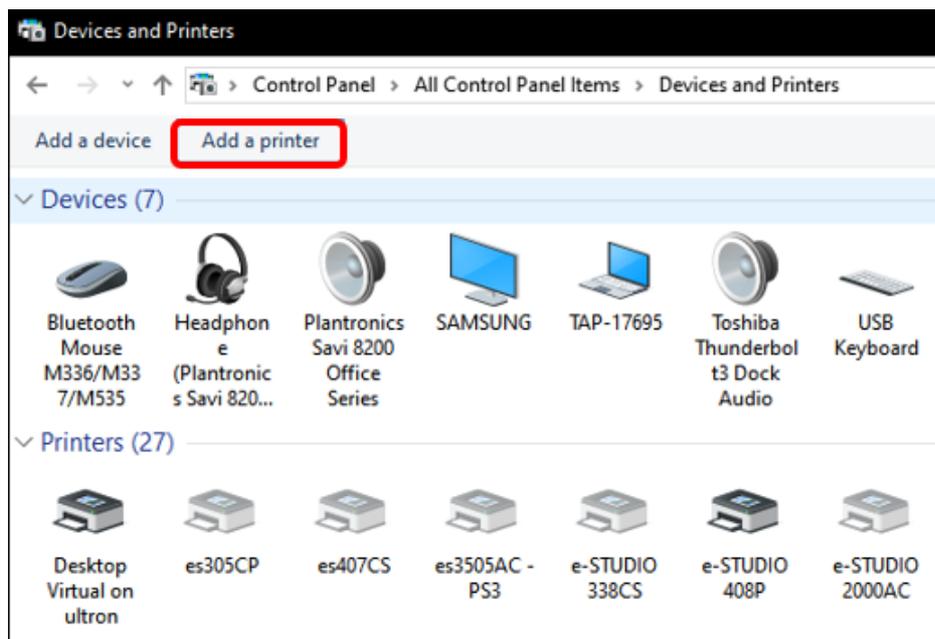


4. Next press “The printer that I want isn’t listed”

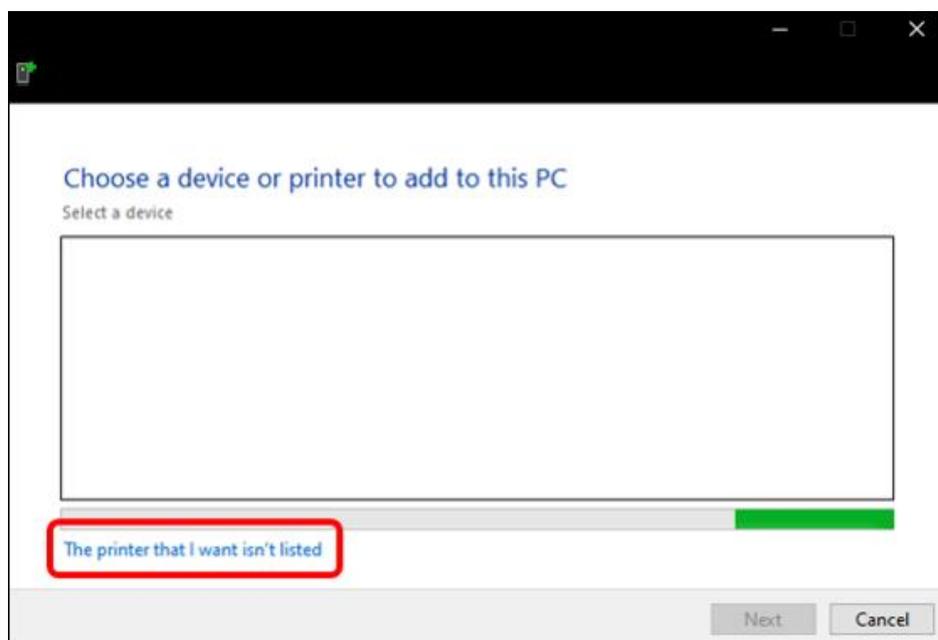


5. Select Add a printer using a “TCP/IP address or hostname” and click “Next”

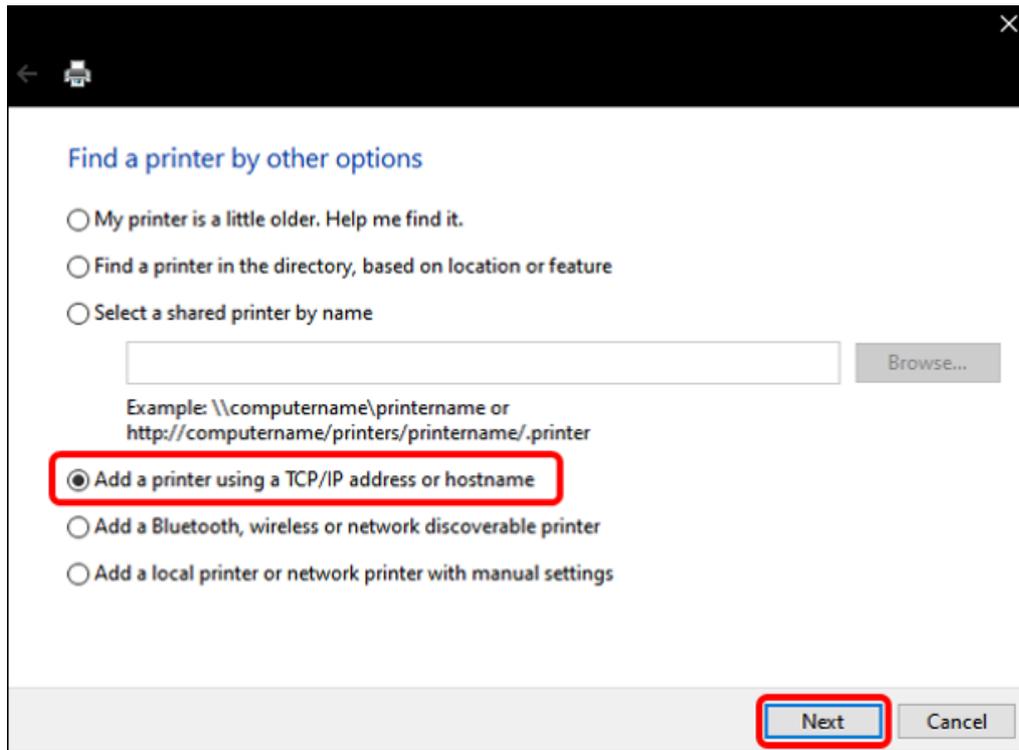


6. Change **Device type** to be **TCP/IP Device** and then type in the IP Address of the MFD in “**Hostname or IP Address**” then uncheck “**Query the printer and automatically select the driver to use**” to deselect that option

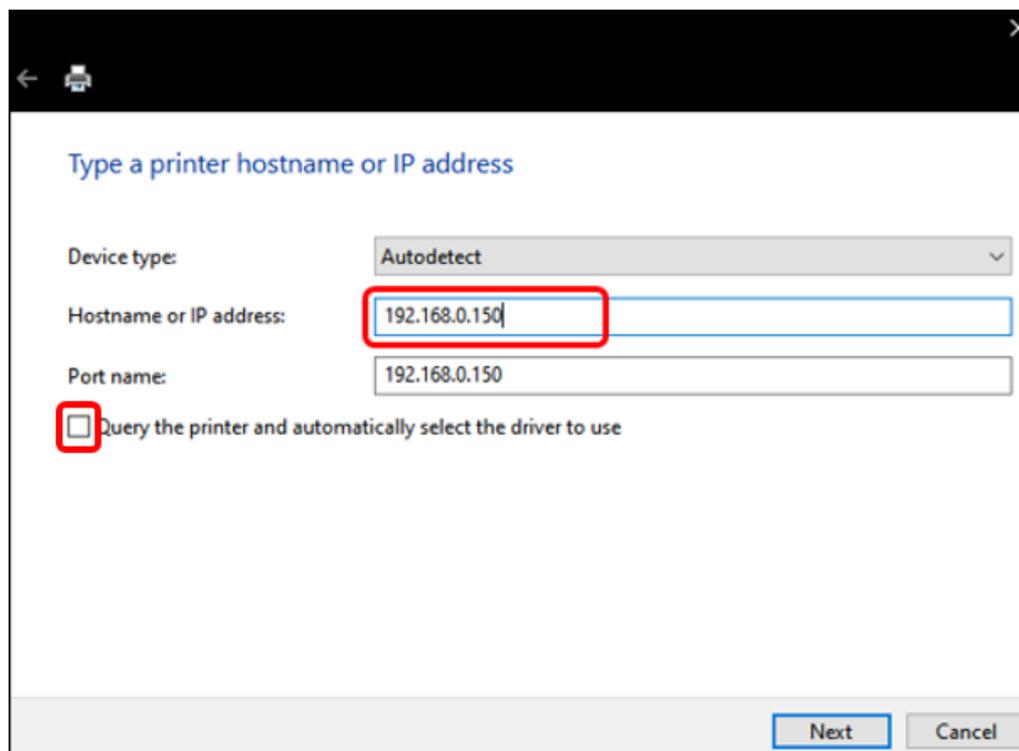


7. Click on **“Have Disk”**

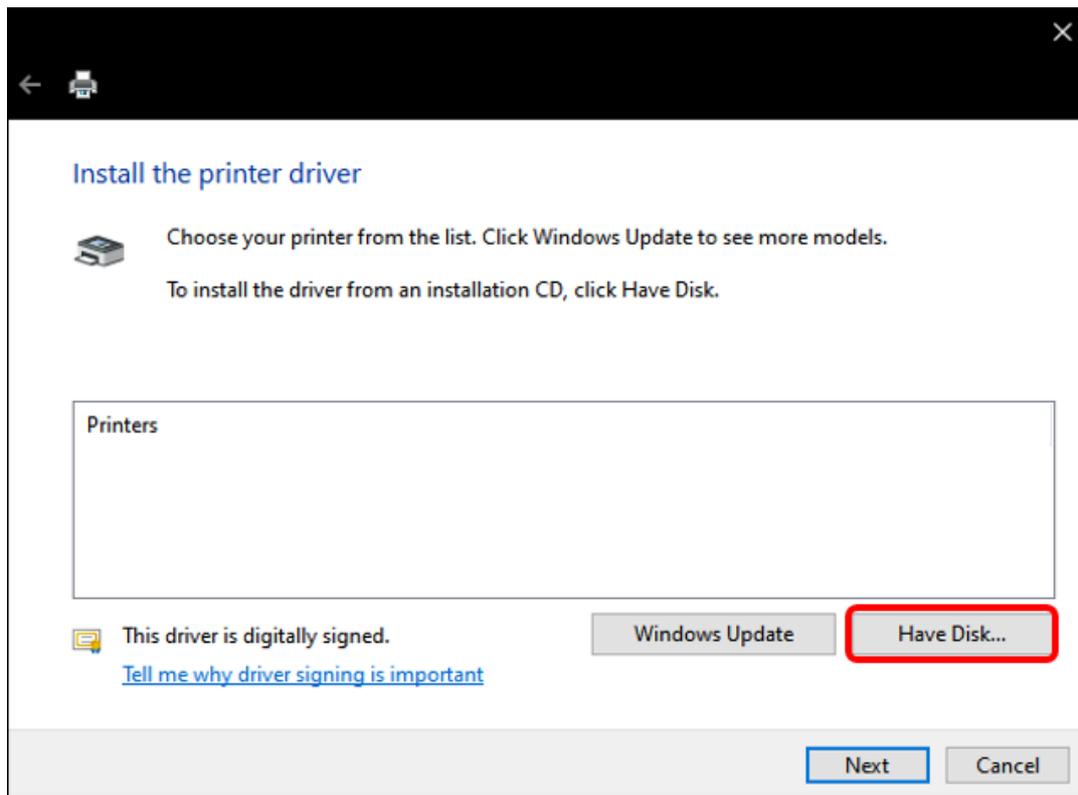


8. Click on **“Browse”**

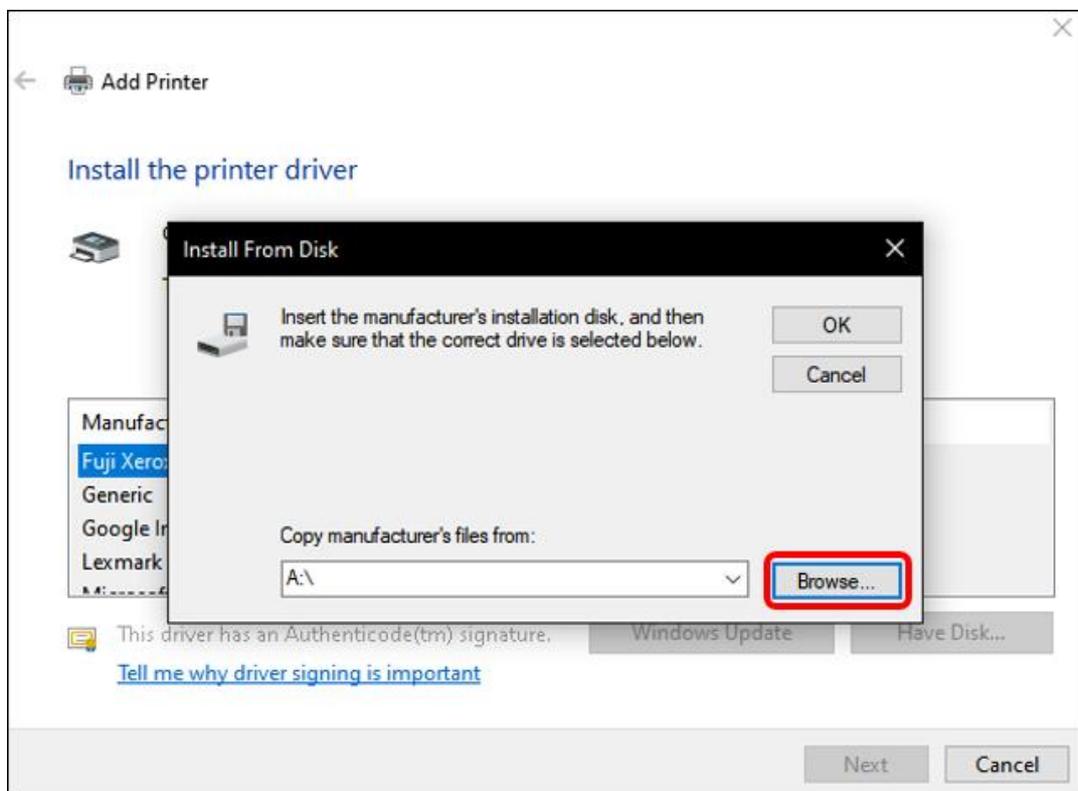


9. Locate the extracted Printer Driver file from our Toshiba Website

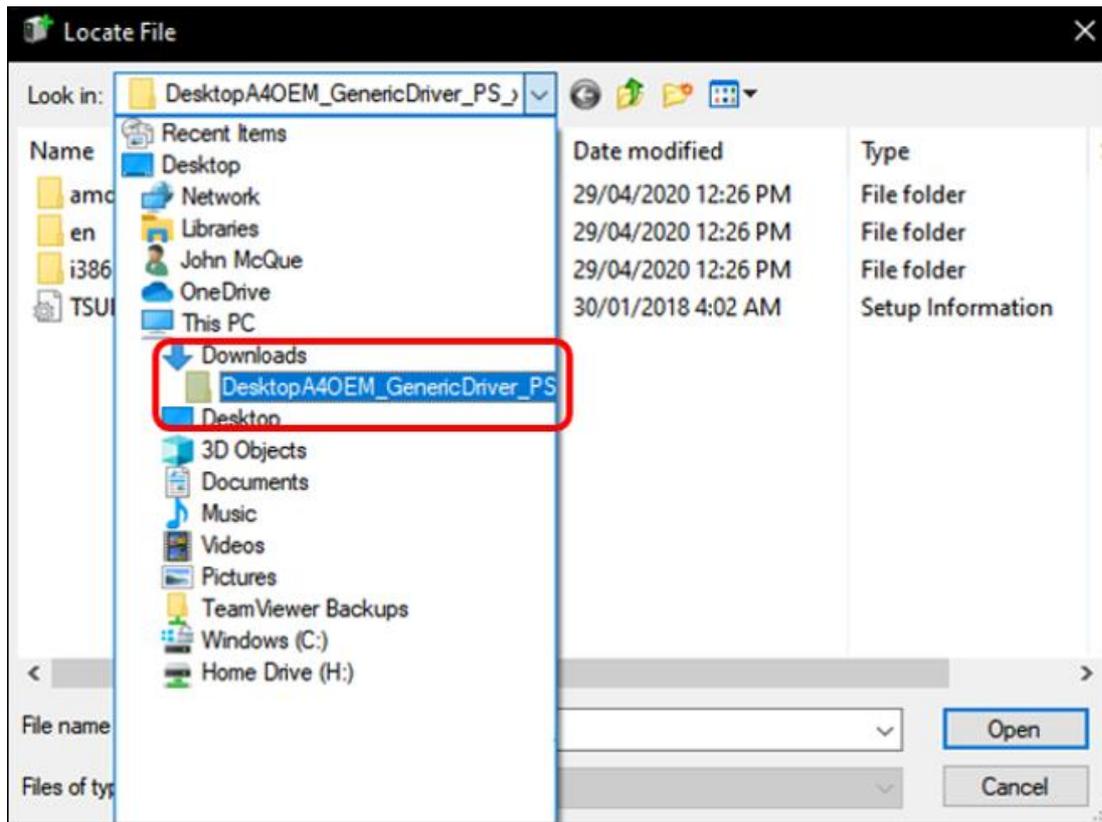


10. Select the .inf file and click “Open”

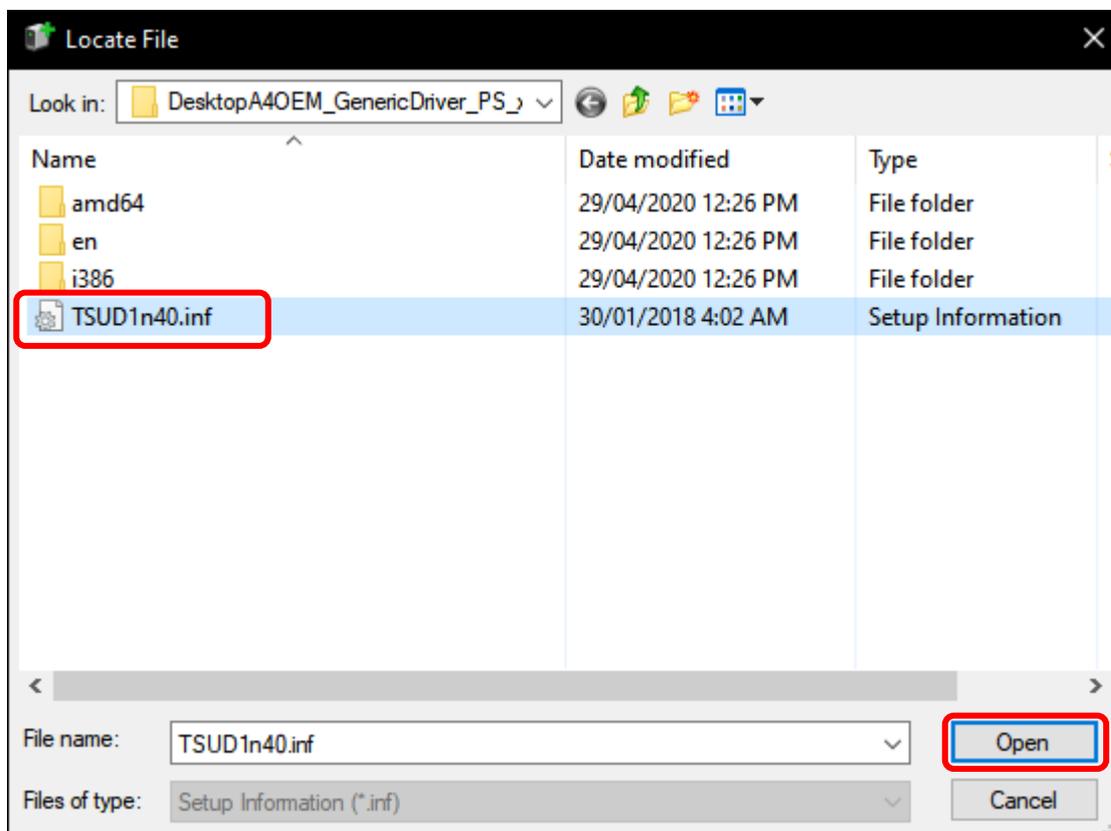


11. Click on “Next”

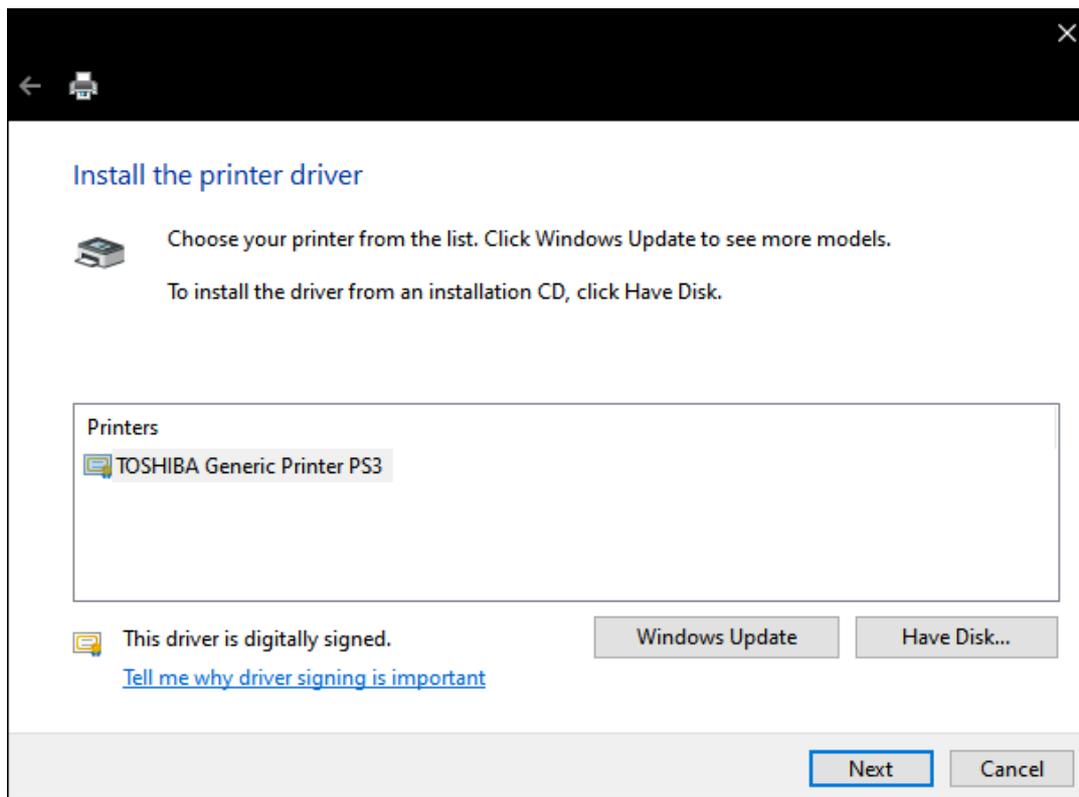

12. Select “TOSHIBA Universal PS3” and click on “Next”

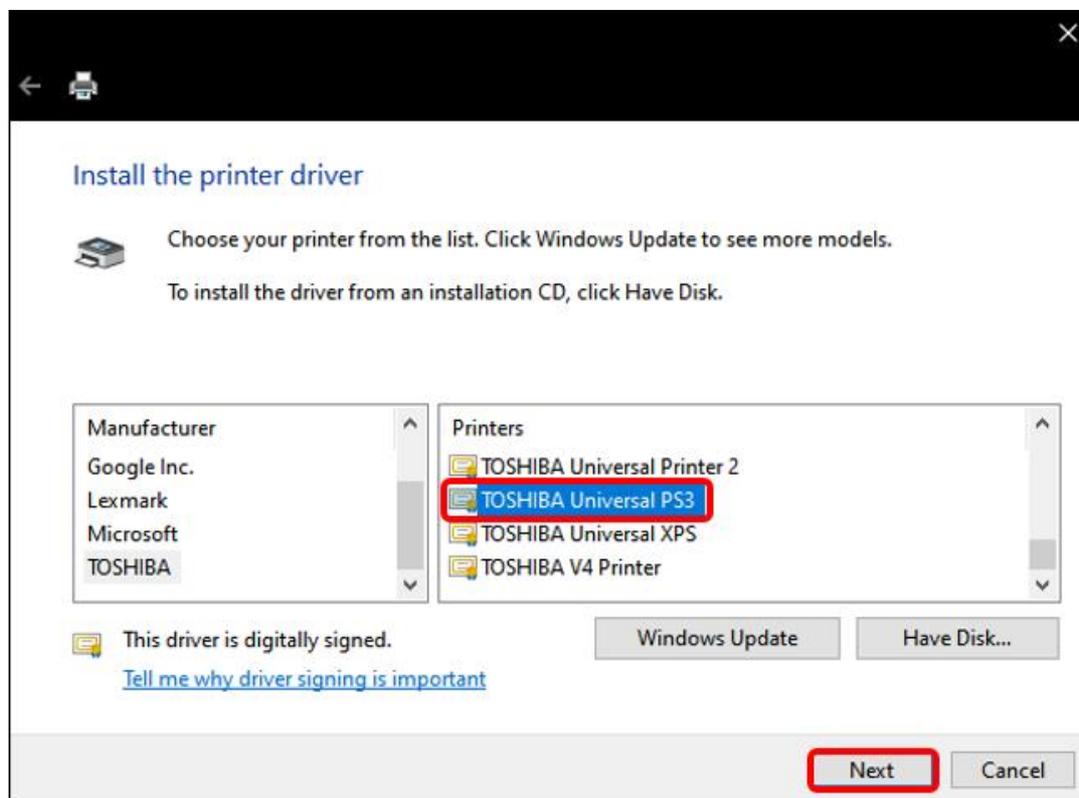


13. Click on **“Replace the Current Driver”** if prompted, then click **“Next”**

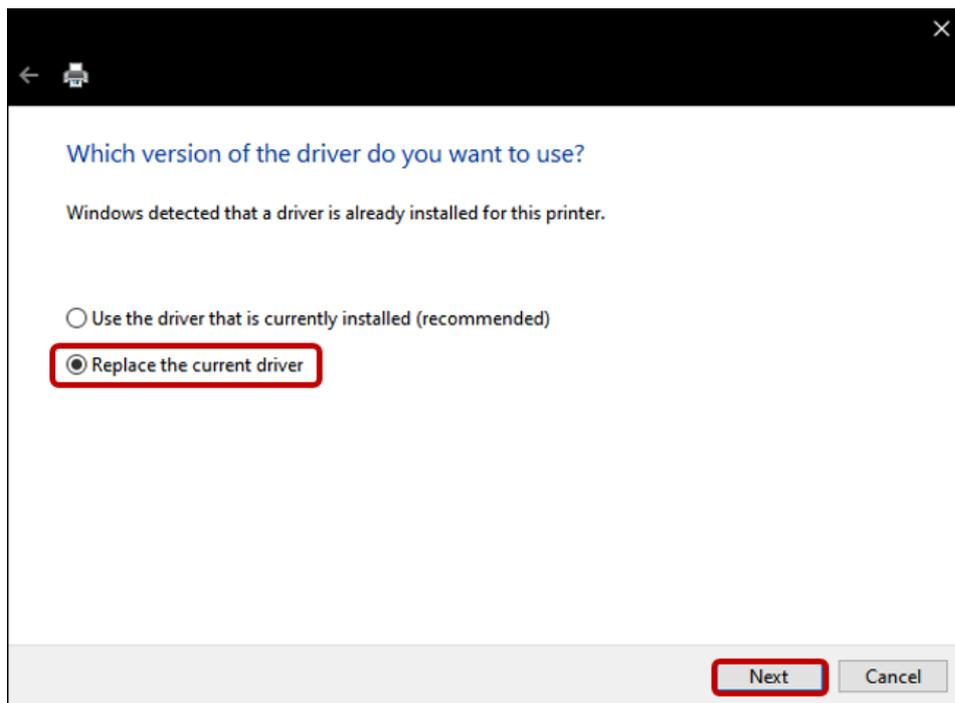


14. Select **“Yes”** if you are prompted to allow **“User Account Control”**

15. Select **“Do not share this printer”** and click **“Next”**

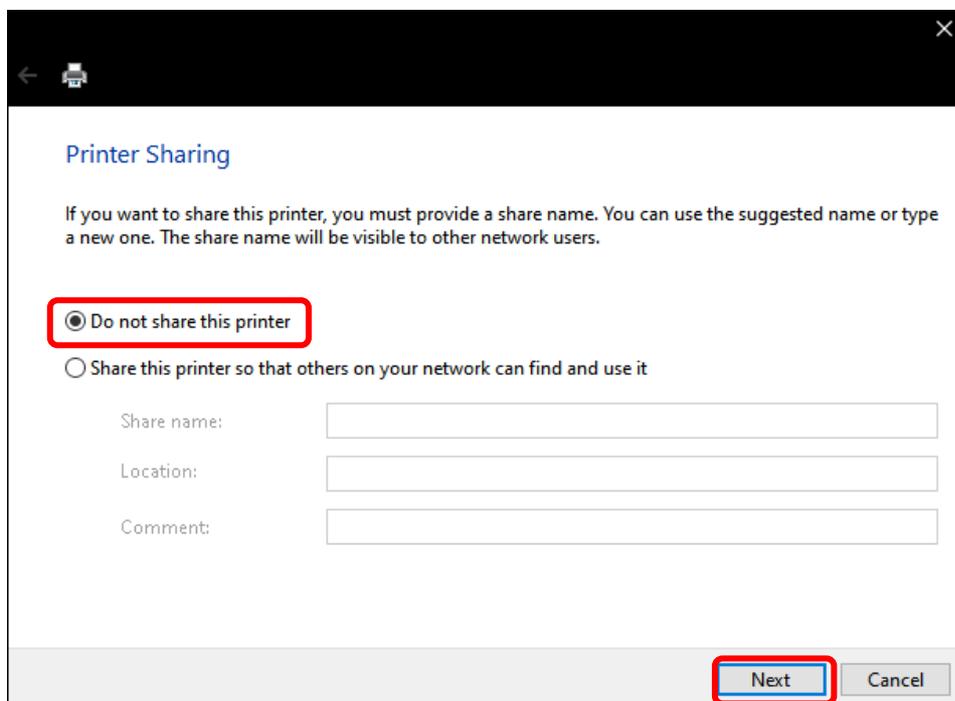


16. Click on **“Print a test page”** and then select **“Finish”**. Check **“Set as the Default Printer”** if required

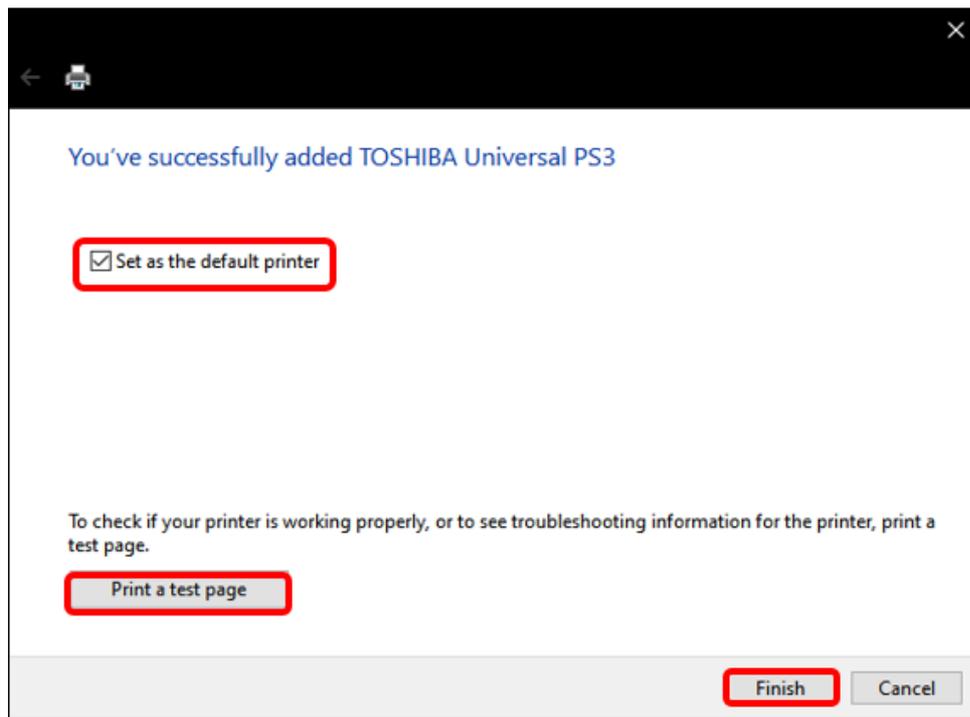


Congratulations! If you can see your printed test page on your Toshiba Copier then you have successfully installed your Toshiba Universal PS3 Print Driver, Please note that it is recommended you change the TCP/IP port settings listed in the **‘Optional Settings’** Chapter following.

Optional Driver Settings


1. Click on the search option on the taskbar, type in “Control Panel” and select

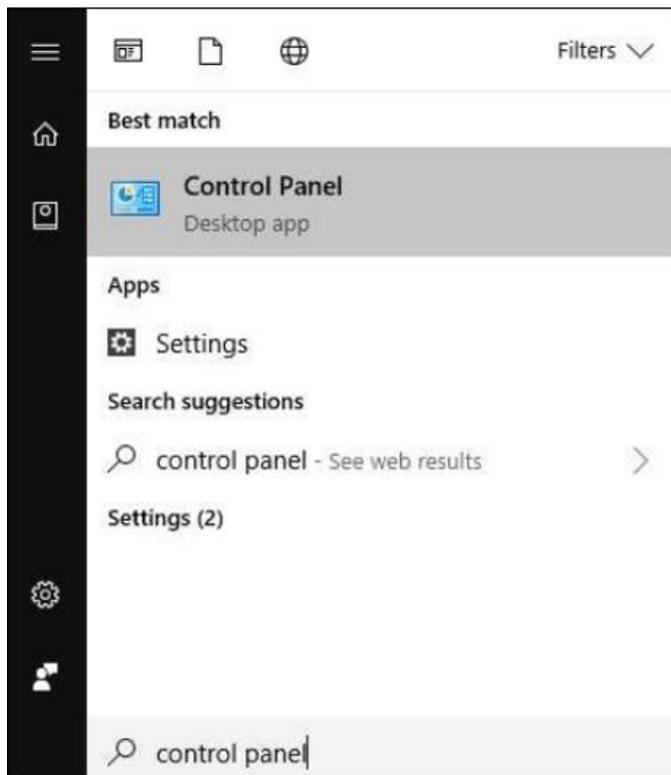


2. Select “View devices and printers”

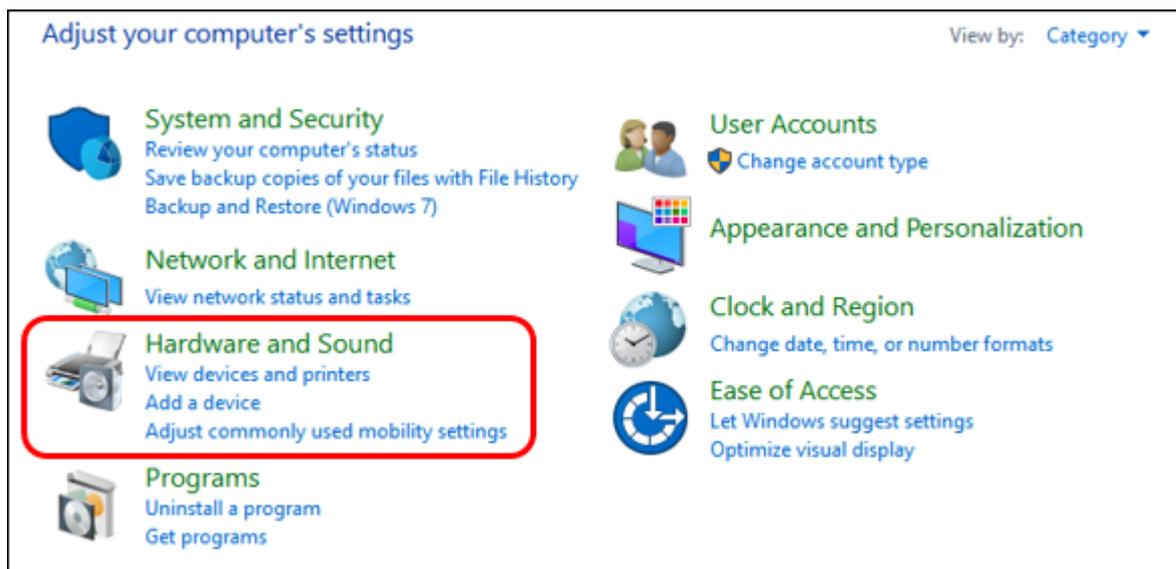


3. Next Right click on your Toshiba Universal PS3 and select “**Printer Properties**”

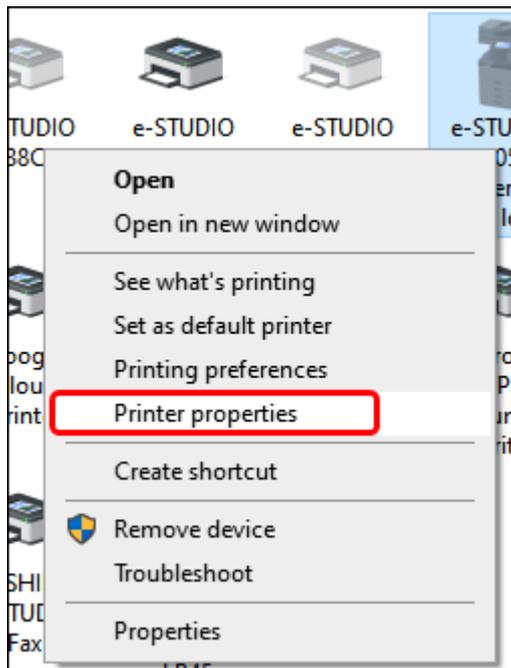


4. Next select the “**Ports**” tab

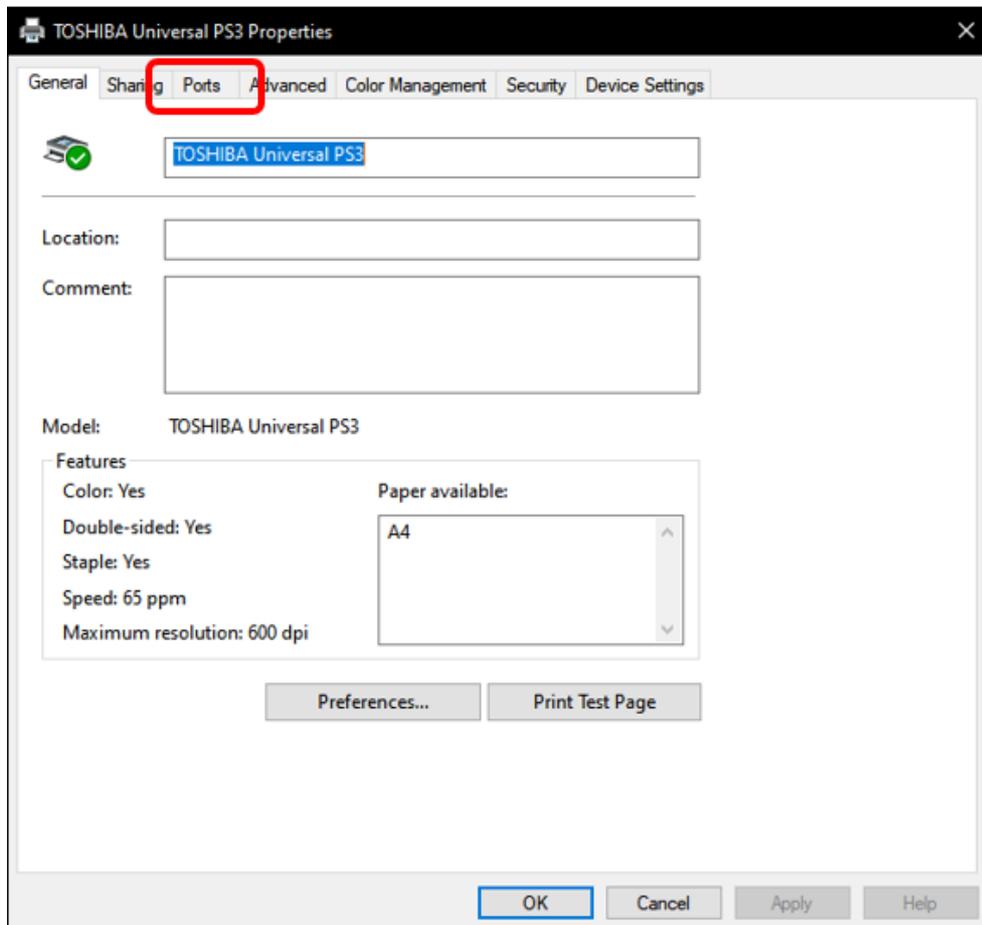

- Next select the **“Configure Port”** button

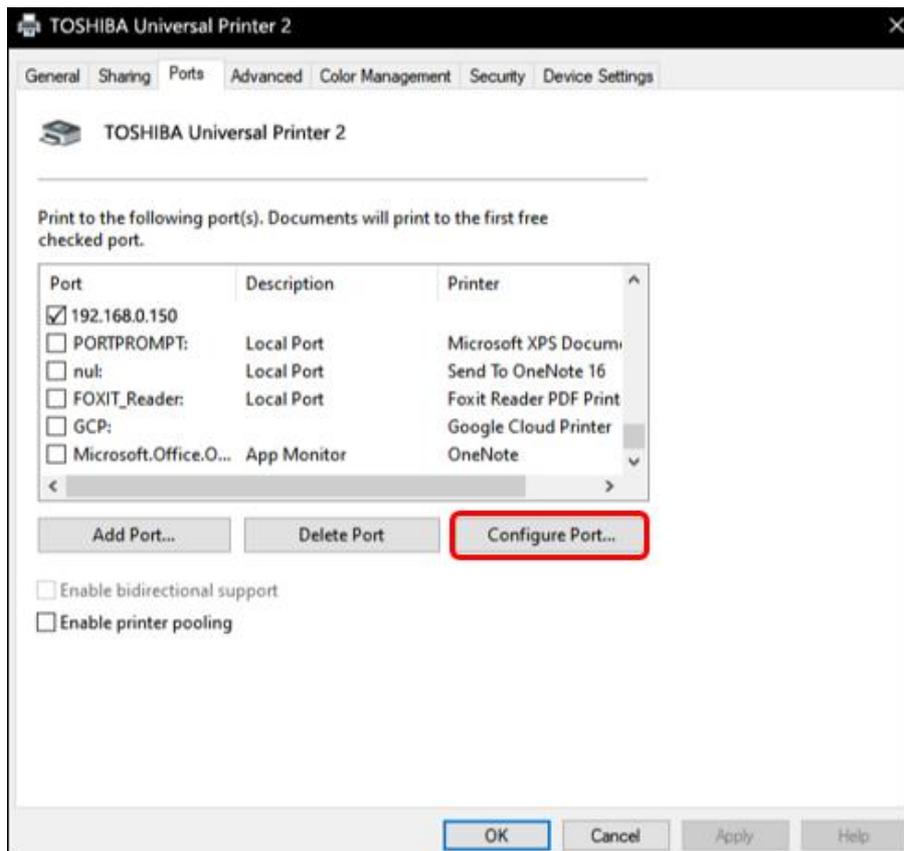

- Next please change the Protocol from **“Raw to LPR”**, after doing this please type **“Print”** into the LPR Settings Queue Name and press **“OK”**

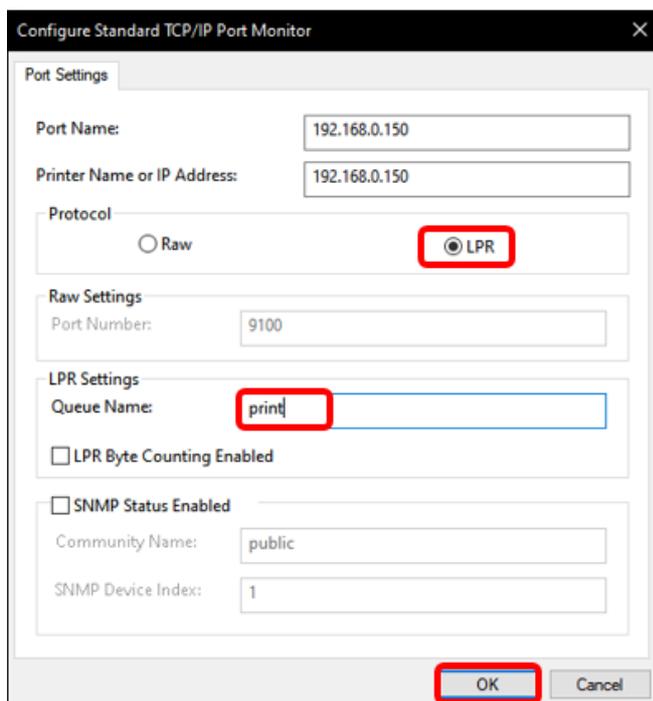

You have now changed the Port Settings for your Toshiba Printer